


# Gas spring G 06-19

<b>Extension force F1</b>	40 - 400 Newton
<b>Progression</b>	17 %
<b>Piston rod</b>	Ø 6 mm, stainless steel
<b>Cylinder</b>	Ø 19 mm, stainless steel, black spray coated
<b>Threads</b>	Steel zinc plated

GZ 10

GZ 10

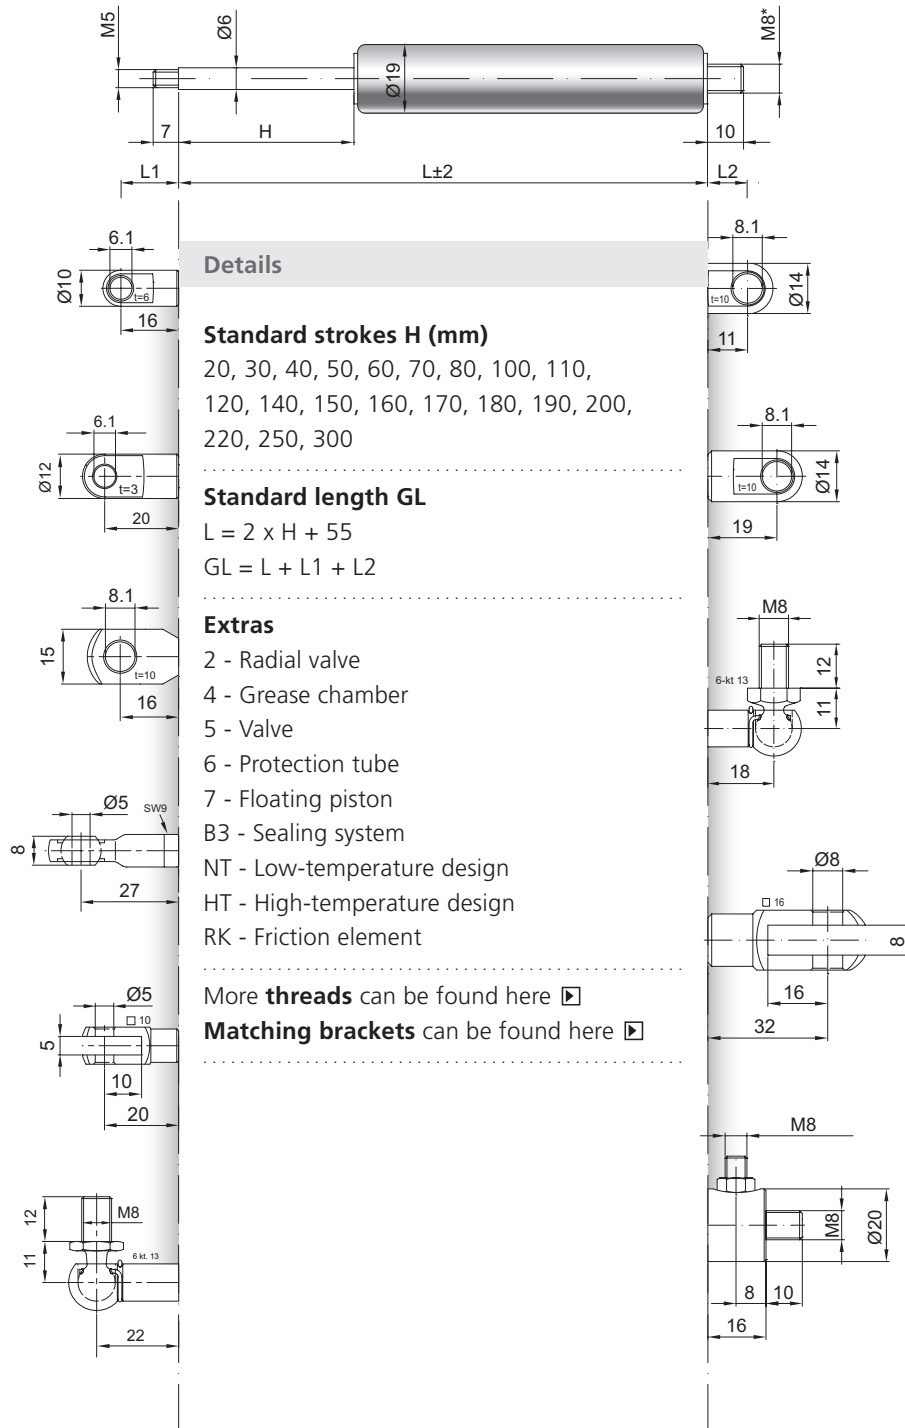

### Details

#### Standard strokes H (mm)

- 20, 30, 40, 50, 60, 70, 80, 100, 110,
- 120, 140, 150, 160, 170, 180, 190, 200,
- 220, 250, 300

#### Standard length GL

$L = 2 \times H + 55$   
 $GL = L + L1 + L2$

#### Extras

- 2 - Radial valve
- 4 - Grease chamber
- 5 - Valve
- 6 - Protection tube
- 7 - Floating piston
- B3 - Sealing system
- NT - Low-temperature design
- HT - High-temperature design
- RK - Friction element

More **threads** can be found here ▶

**Matching brackets** can be found here ▶

*only possible on cylinder end*

*until max. 800 N*

WX 22

QV GZ