


# Gas spring G 08-19


<b>Extension force F1</b>	50 - 700 Newton
<b>Progression</b>	30 %
<b>Piston rod</b>	Ø 8 mm, stainless steel
<b>Cylinder</b>	Ø 19 mm, stainless steel, black spray coated
<b>Threads</b>	Steel zinc plated

GZ 10

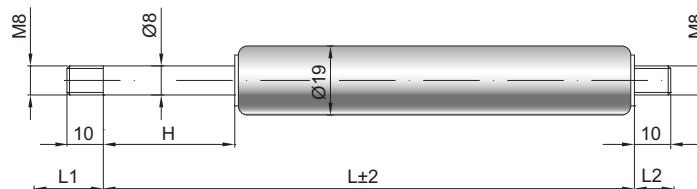

GZ 10

AU 19



### Details

#### Standard strokes H (mm)

40, 50, 60, 70, 80, 100, 110, 120, 140, 150, 160, 180, 200, 220, 250, 300, 350, 400, 500

#### Standard length GL

$L = 2 \times H + 70$   
 $GL = L + L1 + L2$

#### Extras

- 1 - Wiper ring
- 2 - Radial valve
- 4 - Grease chamber
- 5 - Valve
- 6 - Protection tube
- 7 - Floating piston
- 8 - Locking device
- B3 - Sealing system
- NT - Low-temperature design
- HT - High-temperature design
- RK - Friction element


More **threads** can be found here ▶

**Matching brackets** can be found here ▶


AB 11

only possible on cylinder end


AS 24




GA 32




AS 30



GG 32




AR 27




WG 18


until max. 800 N



AG 36



WG 30



QV GZ

